



AR srl

Via Ippolito Nievo, 19 20145 Milano, Italy

ph. +39 2 498 96 57 fax +39 2 498 54 31

e mail: info@ar-srl.com <http://www.ar-assemblaggio.com>





**STAPLERS - PINNERS
BRADDERS - NAILERS**

STAPLERS-PINNERS BRADDERS-NAILERS



STAPLER

CR 80 / 16N




Robust and light-weight, very fast trigger, die-casted aluminum body and magazine, easy safety release. Rubber grip for comfortable handling.

Applications:

Upholstery, furniture, coffin making, binding, polyurethane shutters, prefab etc.

SPECIFICATIONS	
LENGTH	225 mm
HEIGHT	155 mm
WIDTH	45 mm
WEIGHT	0,90 kg
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	160 pcs.

FASTENER'S SPECIFICATIONS	
TYPE	80
CROWN	13 mm
WIRE DIMENSIONS	0,65 x 0,95 mm
LENGTH MIN.-MAX	4 mm - 16 mm



STAPLER

CR 80 / 16AUT



Light-weight, very powerful, die-casted aluminum body and magazine, double actuation valve with speed regulation (0- 1200 cycles/min.) easy safety release.


Rubber grip for comfortable handling.

Applications:

Upholstery, shipbuilding, prefab etc.

SPECIFICATIONS	
LENGTH	228 mm
HEIGHT	150 mm
WIDTH	45 mm
WEIGHT	1,02 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	160 pcs.

FASTENER'S SPECIFICATIONS	
TYPE	80
CROWN	13 mm
WIRE DIMENSIONS	0,65 x 0,95 mm
LENGTH MIN.-MAX	4 mm - 16 mm





STAPLER


CR 80 / 16LN50A

SPECIFICATIONS

LENGTH	210 mm
HEIGHT	191 mm
WIDTH	44 mm
WEIGHT	0,92 kg
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	140 pcs.

FASTENER'S SPECIFICATIONS

TYPE	80
CROWN	13 mm
WIRE DIMENSIONS	0,65 x 0,95 mm
LENGTH MIN.-MAX	4 mm - 16 mm



STAPLER


CR 80 / 25

SPECIFICATIONS

LENGTH	210 mm
HEIGHT	190 mm
WIDTH	50 mm
WEIGHT	1,05 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	140 pcs.

FASTENER'S SPECIFICATIONS

TYPE	80
CROWN	13 mm
WIRE DIMENSIONS	0,65 x 0,95 mm
LENGTH MIN.-MAX.	6 mm - 25 mm



STAPLERS-PINNERS BRADDERS-NAILERS



Robust and light-weight, very fast trigger, die-casted aluminum body and magazine, easy safety release, long nose **50mm**.
Rubber grip for comfortable handling.

Applications:
Upholstery, shipbuilding, prefab etc.



Very powerful, compact and light-weight, easy loading, die-casted aluminum body and magazine, nose safety, directional exhaust.
Rubber grip for comfortable handling.

Applications:
Upholstery, furniture, binding, polyurethane rollers, prefab etc.

STAPLERS-PINNERS BRADDERS-NAILERS



STAPLER

CR 71 / 16




Robust and light-weight, very powerful, very fast trigger, die-casted aluminum body and magazine, easy safety release.
Rubber grip for comfortable handling.

Applications:

Upholstery, shoe making, picture frames etc.

SPECIFICATIONS	
LENGTH	225 mm
HEIGHT	145 mm
WIDTH	45 mm
WEIGHT	0,90 kg
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	160 pcs.

FASTENER'S SPECIFICATIONS	
TYPE	71
CROWN	9 mm
WIRE DIMENSIONS	0,55 x 0,97 mm
LENGTH MIN.-MAX.	6 mm - 16 mm



STAPLER

CR 71 / 16AUT




Light-weight and very powerful, die-casted aluminum body and magazine, double actuation valve with speed regulation (0-1200 cycles/min.), easy safety release.
Rubber grip for comfortable handling.

Applications:

Upholstery

SPECIFICATIONS	
LENGTH	228 mm
HEIGHT	150 mm
WIDTH	45 mm
WEIGHT	1,02 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	160 pcs.

FASTENER'S SPECIFICATIONS	
TYPE	71
CROWN	9 mm
WIRE DIMENSIONS	0,55 x 0,97 mm
LENGTH MIN.-MAX.	6 mm - 16 mm





STAPLER


CR 71 / 16LN50A

SPECIFICATIONS

LENGTH	210 mm
HEIGHT	191 mm
WIDTH	44 mm
WEIGHT	0,92 kg
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	140 pcs.

FASTENER'S SPECIFICATIONS

TYPE	71
CROWN	9 mm
WIRE DIMENSIONS	0,55 x 0,97 mm
LENGTH MIN.-MAX.	6 mm - 16 mm



STAPLERS-PINNERS BRADDERS-NAILERS



Robust and light-weight, very powerful, very fast trigger, die-casted aluminum body and magazine, easy safety release, long nose 50mm. Rubber grip for comfortable handling.

Applications:
Upholstery, shipbuilding, prefab etc.

STAPLER


CR 90 / 25

SPECIFICATIONS

LENGTH	210 mm
HEIGHT	190 mm
WIDTH	50 mm
WEIGHT	1,05 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	140 pcs.

FASTENER'S SPECIFICATIONS

TYPE	R400 (90)
CROWN	5,7 mm
WIRE DIMENSIONS	1,00 x 1,25 mm
LENGTH MIN.-MAX.	10 mm - 25 mm



Very powerful, compact and light-weight, easy loading, die-casted aluminum body and magazine, nose safety, directional exhaust. Rubber grip for comfortable handling.

Applications:
Upholstery, furniture, binding, polyurethane rollers, prefab etc.

STAPLERS-PINNERS BRADDERS-NAILERS



STAPLER

CR 90 / 32B




Very powerful, compact and light-weight, easy loading, die-casted aluminum body and magazine, nose safety, directional exhaust. Rubber grip for comfortable handling.

Applications:

Furniture, curtain-rod, coffin making, sublayers, box making, etc.

SPECIFICATIONS	
LENGTH	346 mm
HEIGHT	248 mm
WIDTH	60 mm
WEIGHT	1,24 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	150 pcs.

FASTENER'S SPECIFICATIONS	
TYPE	R400 (90)
CROWN	5,7 mm
WIRE DIMENSIONS	1,00 x 1,25 mm
LENGTH MIN.-MAX.	10 mm - 30 mm



STAPLER

CR 90 / 40L4




Very powerful and light weight with easy top loading system, single and contact firing systems, depth regulation, quick and easy front dejamming, die-casted **magnesium body**, directional exhaust. Rubber grip for comfortable handling.

Applications:

Furniture, curtain-rod, coffin making, sublayers, box making, etc.

SPECIFICATIONS	
LENGTH	276 mm
HEIGHT	253 mm
WIDTH	62 mm
WEIGHT	1,35 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	135 pcs.

FASTENER'S SPECIFICATIONS	
TYPE	R400 (90)
CROWN	5,7 mm
WIRE DIMENSIONS	1,00 x 1,25 mm
LENGTH MIN.MAX.	10 mm - 38 mm





STAPLER


CR 90 / 40HD

SPECIFICATIONS

LENGTH	285 mm
HEIGHT	262 mm
WIDTH	80 mm
WEIGHT	2,26 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	120 pcs.

FASTENER'S SPECIFICATIONS

TYPE	R400 (90)
CROWN	5,7 mm
WIRE DIMENSIONS	1,00 x 1,25 mm
LENGTH MIN.-MAX	10 mm - 38 mm



STAPLERS-PINNERS BRADDERS-NAILERS



Heavy duty, extra powered and light weight tool. Single and contact firing systems, easy loading, die-casted magnesium body, rapid operation valve, depth regulation. Rubber grip for comfortable handling.

Applications:

Furniture, curtain-rod, coffin making, sublayers, box making etc.

STAPLER


CR 92 / R825

SPECIFICATIONS

LENGTH	240 mm
HEIGHT	200 mm
WIDTH	50 mm
WEIGHT	1,10 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	100 pcs.

FASTENER'S SPECIFICATIONS

TYPE	^A R800	^B 92
CROWN	10 mm	8,7 mm
WIRE DIMENSIONS	1,00 x 1,25 mm	1,00 x 1,25 mm
LENGTH MIN.-MAX	10 mm - 25 mm	9 mm - 25 mm



Very powerful, light-weight and robust with die-casted aluminum body and magazine, depth regulation, nose safety and directional exhaust.

Uses two types of staples:

(92 and R800) with no need for regulations.

Rubber grip for comfortable handling.

Applications:

Furniture, tend making, wood working, shipbuilding, box making, sublayers etc.

STAPLERS-PINNERS BRADDERS-NAILERS



Very powerful, light-weight and robust with die-casted aluminum body and magazine, depth regulation, nose safety and directional exhaust.

Uses two types of staples:

(92 and R800) with no need for regulations.

Rubber grip for comfortable handling.

Applications:

Furniture, tent making, wood working, shipbuilding, box making, sublayers, sofa framing, prefabs, aluminium garage doors etc.



Heavy duty, powerful and light weight tool. Single and contact firing systems, easy loading, die-casted magnesium body, rapid operation valve, depth regulation.

Rubber grip for comfortable handling.

Applications:

Furniture, tent making, wood working, shipbuilding, box making, sublayers, sofa framing, prefabs, aluminium garage doors etc.



STAPLER


CR 92 / R838

SPECIFICATIONS

LENGTH	240 mm
HEIGHT	240 mm
WIDTH	60 mm
WEIGHT	1,10 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	100 pcs.

FASTENER'S SPECIFICATIONS

TYPE	^A R800	^B 92
CROWN	10 mm	8,7 mm
WIRE DIMENSIONS	1,00 x 1,25 mm	1,00 x 1,25 mm
LENGTH MIN.-MAX.	10 mm - 38 mm	9 mm - 40 mm



STAPLER


CR 92 / 40HD

SPECIFICATIONS

LENGTH	285 mm
HEIGHT	262 mm
WIDTH	80 mm
WEIGHT	2,26 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	120 pcs.

FASTENER'S SPECIFICATIONS

TYPE	92
CROWN	8,7 mm
WIRE DIMENSIONS	1,00 x 1,25 mm
LENGTH MIN.-MAX.	9 mm - 40 mm





STAPLER


CR G50H5

SPECIFICATIONS

LENGTH	384 mm
HEIGHT	285 mm
WIDTH	91 mm
WEIGHT	2,15 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	150 pcs.

FASTENER'S SPECIFICATIONS

TYPE	V800
CROWN	10,8 mm
WIRE DIMENSIONS	1,40 x 1,60 mm
LENGTH MIN.-MAX.	25 mm - 50 mm



STAPLERS-PINNERS BRADDERS-NAILERS



Very powerful, light weight, single and contact firing systems, quick and easy top loading, die-casted **magnesium body**, quick and easy front dejamming system.
Rubber grip for comfortable handling.

Applications:

Sofa framing, box making, roofs, casing, pallets, spools and reels, layers, prefabs, etc.

STAPLER & NAILER


CR G/ NT64C

SPECIFICATIONS

LENGTH	368 mm
HEIGHT	298 mm
WIDTH	83 mm
WEIGHT	2,15 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	160 pcs.

FASTENER'S SPECIFICATIONS

TYPE	^A V800	^B NT
CROWN	10,8 mm	6,3 mm
WIRE DIMENSIONS	1,40 x 1,60 mm	1,90 x 2,20 mm
LENGTH MIN.-MAX.	25 mm - 63 mm	32 mm - 63 mm



Very powerful, light weight, single and contact firing systems, quick and easy top loading, die-casted **magnesium body**, quick and easy front dejamming system, depth regulation and directional exhaust. **Uses two kinds of fasteners:** staples V800 and T-nails with no change of parts.
Rubber grip for comfortable handling.

Applications:

Sofa framing, box making, roofs, casing, pallets, spools and reels, layers, prefabs, etc.

STAPLERS-PINNERS BRADDERS-NAILERS



STAPLER

CR P40



Very powerful, robust and light weight, quick and easy loading, die-casted aluminum body and magazine, quick and easy front dejamming system, ergonomic design for continuous use, low air consumption, directional exhaust. Rubber grip for comfortable handling.

Applications:


Items connections, fastening insulating materials on roofs, nailing canadian tiles, fastening cartons in pallets etc.

SPECIFICATIONS

LENGTH	360 mm
HEIGHT	270 mm
WIDTH	77 mm
WEIGHT	2,30 kgs
OPERATING PRESSURE	4,5-7,5 bar
LOAD CAPACITY	140 pcs.

FASTENER'S SPECIFICATIONS

TYPE	P
CROWN	26,5 mm
WIRE DIMENSIONS	1,40 x 1,60 mm
LENGTH MIN.-MAX.	12 mm - 38 mm



PINNER

CR 64 / 12 - 22



Robust, powerful and light weight, easy exterior length regulation of pin, die-casted aluminium body and magazine, easy safety release, slim nose. Rubber grip for comfortable handling.

Applications:


Furniture, box manufacturing, shipbuilding, wooden toys etc.

SPECIFICATIONS

LENGTH	228 mm
HEIGHT	182 mm
WIDTH	45 mm
WEIGHT	1,00 kg
OPERATING PRESSURE	4-6 bar
LOAD CAPACITY	200 pcs.

FASTENER'S SPECIFICATIONS

TYPE	6 (64)
STEM DIMENSIONS	Ø 0,64 mm
LENGTH	12 - 15 - 18 20 - 22 mm





PINNER


CR P64 / 35 SCT

SPECIFICATIONS

LENGTH	202 mm
HEIGHT	188 mm
WIDTH	37 mm
WEIGHT	0,99 kg
OPERATING PRESSURE	4-6 bar
LOAD CAPACITY	100 pcs.

FASTENER'S SPECIFICATIONS

TYPE	^A 6 (64)	^B CT6
STEM DIMENSIONS	Ø 0,64 mm	0,54 x 0,75 mm
HEAD DIMENSIONS	-	0,90 x 0,75 mm
LENGTH	12-15-18-20-22-25-30-35 mm	



STAPLERS-PINNERS BRADDERS-NAILERS



Robust, powerful and light weight, die-casted aluminum body and magazine, easy safety release, slim nose. **Uses headless (type 6) and with head (type CT6) pins** without any part's change. Rubber grip for comfortable handling.

Applications:

Furniture, box manufacturing, shipbuilding, wooden toys etc.

PINNER


CR P64 / 50 SCT

SPECIFICATIONS

LENGTH	202 mm
HEIGHT	221 mm
WIDTH	37 mm
WEIGHT	1,21 kgs
OPERATING PRESSURE	4-6 bar
LOAD CAPACITY	100 pcs.

FASTENER'S SPECIFICATIONS

TYPE	^A 6 (64)	^B CT6
STEM DIMENSIONS	Ø 0,64 mm	0,54 x 0,75 mm
HEAD DIMENSIONS	-	0,90 x 0,75 mm
LENGTH	12-15-18-20-22-25-30-35-40-45-50 mm	



New design, smaller dimensions, light weight. This robust tool brings a new patented magazine, which provides an excellent guiding without jamming. Very slim nose and special assembly which leaves the surface flawless. Capability of using **headless (type 6) and with head (type CT6) pins** without any part's change. Rubber grip for comfortable handling.

Applications

Furniture, box manufacturing, shipbuilding, wooden toys etc.

STAPLERS-PINNERS BRADDERS-NAILERS



PINNER



Robust, powerful and light weight, die-casted aluminum body and magazine, easy safety release, slim nose. **Uses headless (type 8) and with head (type MB) pins** without any part's change. Rubber grip for comfortable handling.

Applications:

Furniture, box manufacturing, shipbuilding, wooden toys etc.


CR MB - 8 / 40

SPECIFICATIONS

LENGTH	225 mm
HEIGHT	200 mm
WIDTH	42 mm
WEIGHT	1,00 kg
OPERATING PRESSURE	4-6 bar
LOAD CAPACITY	200 pcs.

FASTENER'S SPECIFICATIONS

TYPE	^A 8	^B MB
STEM DIMENSIONS	Ø 0,82 mm	0,90 x 0,70 mm
HEAD DIMENSIONS	-	1,50 x 0,70 mm
LENGTH	15-18-20-22-25-30-35-40 mm	



BRADDER



Capability of using both **headless (type I) and with head (type 12) brads**, easy side loading, powerful with small volume and weight, slim nose, die-casted aluminum body and cartridge. Rubber grip for comfortable handling.

Applications:

Furniture, box manufacturing, coffin making, shipbuilding, wooden toys, upholstery etc.


CR GN - I / 30

SPECIFICATIONS

LENGTH	240 mm
HEIGHT	200 mm
WIDTH	55 mm
WEIGHT	1,10 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	100 pcs.

FASTENER'S SPECIFICATIONS

TYPE	^A I	^B 12
STEM DIMENSIONS	0,95 x 1,25 mm	1,00 x 1,25 mm
HEAD DIMENSIONS	-	1,00 x 2,00 mm
LENGTH	15 mm - 30 mm	11 mm - 30 mm





BRADDER


CR 12 / 32S2

SPECIFICATIONS

LENGTH	242 mm
HEIGHT	218 mm
WIDTH	60 mm
WEIGHT	1,08 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	100 pcs.

FASTENER'S SPECIFICATIONS

TYPE	12
STEM DIMENSIONS	1,00 x 1,25 mm
HEAD DIMENSIONS	1,00 x 2,00 mm
LENGTH MIN.-MAX.	11 mm - 30 mm



STAPLERS-PINNERS BRADDERS-NAILERS



Powerful, light weight, quick and easy side loading quick and easy front dejamming, single and contact firing systems, depth regulation, die-casted **magnesium body**, directional exhaust. Rubber grip for comfortable handling.

Applications:

Furniture, box manufacturing, coffin making, shipbuilding, wooden toys, picture frame, shoe making, brush making, etc.

BRADDER

CR 12 / 57S2

SPECIFICATIONS

LENGTH	247 mm
HEIGHT	251 mm
WIDTH	60 mm
WEIGHT	1,24 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	100 pcs.

FASTENER'S SPECIFICATIONS

TYPE	12
STEM DIMENSIONS	1,00 x 1,25 mm
HEAD DIMENSIONS	1,00 x 2,00 mm
LENGTH MIN.-MAX	11 mm - 57 mm



Powerful, light weight, quick and easy side loading, quick and easy front dejamming, single and contact firing systems, depth regulation, die-casted **magnesium body**, directional exhaust. Rubber grip for comfortable handling.

Applications:

Furniture, box manufacturing, shipbuilding, wooden toys, picture frame, shoe making, brush making, rabote, etc.

STAPLERS-PINNERS BRADDERS-NAILERS



BRADDER



Light weight, small volume yet robust and powerful, quick and easy side loading, quick and easy front dejamming, single and contact firing systems, adjustable depth control, die-casted aluminum body and cartidge, directional exhaust.
Rubber grip for comfortable handling.

Applications:

Furniture, box manufacturing, shipbuilding, wooden toys, picture frame, shoe making, brush making, rabote, bamboo, kitchens etc.


CR 14 / 50 L

SPECIFICATIONS

LENGTH	286 mm
HEIGHT	248 mm
WIDTH	70 mm
WEIGHT	1,54 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	100 pcs.

FASTENER'S SPECIFICATIONS

TYPE	14
STEM DIMENSIONS	1,40 x 1,60 mm
HEAD DIMENSIONS	1,40 x 2,80 mm
LENGTH MIN.-MAX.	20 mm - 50 mm



BRADDER



Robust, very powerful and light weight, easy loading, quick and easy front dejamming, single and contact firing systems, adjustable depth control, die-casted **magnesium body**, directional exhaust.
Rubber grip for comfortable handling.

Applications:

Furniture, box manufacturing, shipbuilding, wooden toys, picture frame, shoe making, brush making, rabote, bamboo, kitchens etc.


CR 14 / 64 P5

SPECIFICATIONS

LENGTH	317 mm
HEIGHT	281 mm
WIDTH	84 mm
WEIGHT	1,80 kgs
OPERATING PRESSURE	5,0-7,5 bar
LOAD CAPACITY	100 pcs.

FASTENER'S SPECIFICATIONS

TYPE	14
STEM DIMENSIONS	1,40 x 1,60 mm
HEAD DIMENSIONS	1,40 x 2,80 mm
LENGTH MIN.-MAX.	20 mm - 64 mm





BRADDER


CR F1.8 / 57C

SPECIFICATIONS

LENGTH	305 mm
HEIGHT	290 mm
WIDTH	67 mm
WEIGHT	1,80 kgs
OPERATING PRESSURE	4,5-7,0 bar
LOAD CAPACITY	100 pcs.

FASTENER'S SPECIFICATIONS

TYPE	A 14	B FST
STEM DIMENSIONS	1,40 x 1,60 mm	Ø 1,80 mm
HEAD DIMENSIONS	1,40 x 2,80 mm	1,80 x 3,00 mm
LENGTH MIN.-MAX.	20 mm - 55 mm	15 mm - 50 mm



STAPLERS-PINNERS BRADDERS-NAILERS



Light weight, compact and very powerful, quick easy side loading and front dejamming, single and contact firing systems, adjustable depth control, die-casted **magnesium body** and cartridge, directional exhaust. Rubber grip for comfortable handling. Specially design for use of **two** materials: Small brad with head type 14 simple (steel) from 20mm until 55mm. Steely brad type FST from 15mm until 50mm, for special nailing of wood, floating screed or aluminium in aluminium, metal, concrete and other hard materials.

Applications:

Furniture, box manufacturing, shipbuilding, wooden toys, picture frame, shoe making, brushmaking, rabote, bamboo, kitchens, casing, parquetry, wall-base, window sill, etc.

T-NAILER


CR NT64F

SPECIFICATIONS

LENGTH	305 mm
HEIGHT	305 mm
WIDTH	92 mm
WEIGHT	2,50 kgs
OPERATING PRESSURE	5,0-7,5 bar
LOAD CAPACITY	100 pcs.

FASTENER'S SPECIFICATIONS

TYPE	A NTHC	B NT
STEM DIMENSIONS	Ø 2,20	1,90 x 2,20 mm
HEAD DIMENSIONS	2,20 x 7,00 mm	2,00 x 6,00 mm
LENGTH MIN.-MAX.	15 mm - 64 mm	32 mm - 63 mm



Very powerful, robust, fast, narrow nose for accurate nailing, sequential fastening system, easy side loading, die-casted **magnesium body** and cartridge. Rubber grip for comfortable handling.

Specially design for use of **two** materials: T-nail type NT simple (steel) from 32mm until 63mm. **Steely nail** type NTHC from 15mm until 64mm, for special nailing of wood, floating screed or aluminium in aluminium, metal, concrete and other hard materials.

Applications:

Sofa framing, upholstery, box making, roofs, spools and reels, prefab, parquetry, wall-base, etc.

STAPLERS-PINNERS BRADDERS-NAILERS



CORRUGATED NAILER

CR MINI - CF16S



Very powerful, robust and light weight, quick and easy loading, die-casted aluminium body and magazine, quick and easy front dejamming system, ergonomic design for continuous use, low air consumption, directional exhaust.

Rubber grip for comfortable handling.

Applications:

Items connections, kitchen doors, furniture, picture frames, painting panels, etc.

SPECIFICATIONS

LENGTH	360 mm
HEIGHT	270 mm
WIDTH	77 mm
WEIGHT	2,30 kgs
OPERATING PRESSURE	4,5-7,5 bar
LOAD CAPACITY	80 pcs.

FASTENER'S SPECIFICATIONS

TYPE	MiniCF
BLADE WIDTH	12,7 mm
LENGTH	6-8-9-12-15mm



CORRUGATED NAILER

CR CF15S



Robust, very powerful and light weight, easy loading, die-casted magnesium body, easy front dejamming system, ergonomic design, slim nose for accurate nailing, directional exhaust.

Rubber grip for comfortable handling.

Applications:

Items connections, prefab panels, casing, furniture, etc.

SPECIFICATIONS

LENGTH	300 mm
HEIGHT	270 mm
WIDTH	92 mm
WEIGHT	2,60 kgs
OPERATING PRESSURE	5-7,5 bar
LOAD CAPACITY	80 pcs.

FASTENER'S SPECIFICATIONS

TYPE	CF
BLADE WIDTH	25,4 mm
LENGTH	8-10-13-15 mm





ROUND HEAD NAILER


CR C65

SPECIFICATIONS

LENGTH	300 mm
HEIGHT	330 mm
WIDTH	130 mm
WEIGHT	2,45 kgs
OPERATING PRESSURE	5,0-7,0 bar
LOAD CAPACITY	200 -300 pcs./coil

FASTENER'S SPECIFICATIONS

TYPE	RBW-T4, RBW
STEM DIMENSIONS	Ø 2,1 - 2,5 mm
HEAD DIMENSIONS	Ø 4,0 - 6,0 mm
LENGTH MIN.-MAX.	30 mm - 60 mm



ROUND HEAD NAILER


CR C75

SPECIFICATIONS

LENGTH	340 mm
HEIGHT	350 mm
WIDTH	130 mm
WEIGHT	3,40 kgs
OPERATING PRESSURE	5,0-7,5 bar
LOAD CAPACITY	200 - 300 pcs./coil

FASTENER'S SPECIFICATIONS

TYPE	RBW
STEM DIMENSIONS	Ø 2,1 - 2,5 mm
HEAD DIMENSIONS	Ø 5,0 - 6,0 mm
LENGTH MIN.-MAX.	50 mm - 70 mm



STAPLERS-PINNERS BRADDERS-NAILERS



Small sized, light weight yet very powerful tool with easy side loading, height regulation in the cartridge, depth regulation, die-casted magnesium body, directional exhaust.

Rubber grip for comfortable handling

Applications:

Box making, woodworking, pallets, roofs, prefab, etc.



Heavy duty, light weight yet very powerful, easy loading, height regulation in the cartridge, depth regulation, die-casted magnesium body, directional exhaust.

Rubber grip for comfortable handling.

Applications:

Box making, woodworking, pallets, roofs, prefab, building, etc.

STAPLERS-PINNERS BRADDERS-NAILERS



Heavy duty, extra powered and relatively light weight tool with side loading, height regulation in the cartridge, depth regulation, die-casted **magnesium body** and directional exhaust. Rubber grip for comfortable handling.

Applications:

Box making, woodworking, pallets, roofs, prefab, building, etc.

ROUND HEAD NAILER


CR C90

SPECIFICATIONS

LENGTH	340 mm
HEIGHT	365 mm
WIDTH	130 mm
WEIGHT	3,40 kgs
OPERATING PRESSURE	5,0-7,5 bar
LOAD CAPACITY	200 - 300 pcs./coil

FASTENER'S SPECIFICATIONS

TYPE	RBW
STEM DIMENSIONS	Ø 2,50 - 3,10 mm
HEAD DIMENSIONS	Ø 6,0 - 7,0 mm
LENGTH MIN.-MAX.	50 mm - 90 mm



Huge power and light weight, die-casted **magnesium body**, oversized design of tunic for more force, ergonomic design for continuous use, collateral handhold for easy grip, slim nose for accurate nailing, quick & easy supply of material.

Applications:

Structural frames, frames and residences' roofs, floors - roofs sublayers, pallets - spools and reels, wooden boxes, platforms construction, prefabrication - moulds, etc.

ROUND HEAD NAILER


CR S-130G

SPECIFICATIONS

LENGTH	580 mm
HEIGHT	440 mm
WIDTH	159 mm
WEIGHT	5,20 kgs
OPERATING PRESSURE	5,0-7,5 bar
LOAD CAPACITY	56 - 70 pcs.

FASTENER'S SPECIFICATIONS

TYPE	LSN
STEM DIMENSIONS	Ø 3,30 - 4,20 mm
HEAD DIMENSIONS	Ø 9 mm
LENGTH MIN.-MAX.	100 mm - 130 mm





ROUND HEAD NAILER


CR S-160G

SPECIFICATIONS

LENGTH	588 mm
HEIGHT	505 mm
WIDTH	159 mm
WEIGHT	6,70 kgs
OPERATING PRESSURE	5,0-7,5 bar
LOAD CAPACITY	44 pcs.

FASTENER'S SPECIFICATIONS

TYPE	LSN
STEM DIMENSIONS	Ø 3,80 - 4,60 mm
HEAD DIMENSIONS	Ø 9 mm
LENGTH MIN.-MAX.	100 mm - 160 mm



SPECIAL NAILER FOR INSULATING MATERIALS


CR C-50WPC

SPECIFICATIONS

LENGTH	240 mm
HEIGHT	239 mm
WIDTH	160 mm
WEIGHT	2,8 kgs
OPERATING PRESSURE	5,0-7,0 bar
LOAD CAPACITY	200 -300 pcs./coil
ROSETTE CAPACITY	100 pcs.

FASTENER'S SPECIFICATIONS

TYPE	^A RBW-T4	^B PC 25
STEM DIMENSIONS	Ø 2,1 - 2,5 mm	DIAMETER 25 mm
HEAD DIMENSIONS	Ø 4 mm	
LENGTH MIN.-MAX.	20 mm - 50 mm	



STAPLERS-PINNERS BRADDERS-NAILERS



Huge power and light weight, die-casted **magnesium body**, oversized design of tunic for more force, ergonomic design for continuous use, collateral handhold for easy grip, slim nose for accurate nailing, quick & easy supply of material.

Applications:

Structural frames, frames and residences' roofs, floors - roofs sublayers, pallets - spools and reels, wooden boxes, platforms construction, prefabrication - moulds, etc.



Special tool for holding soft or frail materials (glasswool, rockwool, heraklith, etc) that are used mainly for insulations of roofs and walls. It uses also a special rosette of 25mm, in order to retain robustly the frail material without destroying it.

Applications:

Fastening insulating materials on roofs, prefabricated walls, etc.

STAPLERS-PINNERS BRADDERS-NAILERS



LOOSE-NAIL'S NAILER

CR P300



Compact and powerful tool for planting loose nails from 30 mm up to 180 mm height. Fast, jamless and robust with high efficiency. Incorporated magnet to the nose for nail holding. Auto-start by simple pressure without the use of trigger.

Applications:


Wooden construction, prefab, roofs, pallets, shipbuilding etc.

SPECIFICATIONS

LENGTH	120 mm
HEIGHT	121 mm
WEIGHT	1,10 kgs
OPERATING PRESSURE	5 - 8 bar

FASTENER'S SPECIFICATIONS

TYPE	COMMON NAIL
STEM DIMENSIONS	Ø 2,10 - 4,00 mm
HEAD DIMENSIONS	Ø 5,00 - 9,00 mm
LENGTH MIN.-MAX.	30 mm - 180 mm







FRAME ASSEMBLY





FRAME ASSEMBLY

FRAME UNDERPINNER


CR V15 - ECO1

SPECIFICATIONS

LENGTH	550 mm
HEIGHT	430 mm
WIDTH	300 mm
WEIGHT	32,50 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	250 pcs.

FASTENER'S SPECIFICATIONS

TYPE	VEH
CROWN	10,8 mm
LENGTH	7-10-12-15 mm



Compact construction, powerful and easy to use, for perfect joints at 90°, 120°, 135° even curves. Easy to regulate power, hands-free operation by foot-pedal.

Applications:

Picture frames, cabinet doors, frames assembly, etc.

V-NAILER


CR V15 - EH

SPECIFICATIONS

LENGTH	240 mm
HEIGHT	200 mm
WIDTH	50 mm
WEIGHT	1,30 kgs
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	300 pcs.

FASTENER'S SPECIFICATIONS

TYPE	VEH
CROWN	10,8 mm
LENGTH	7-10-12-15 mm



Very powerful, light-weight and robust with die-casted aluminum body and magazine. Adjustable depth control and directional exhaust. Accompanied by two 90° corner stabilization accessories with depth regulation. Indispensable for butt or mitre joints.

Applications:

Picture frames, cabinet doors, door and window frames, furniture, toys, DIY, etc.

FRAME ASSEMBLY



WEDGE NAILER

CR W5 / 15



Light-weight, fast and accurate in use, die-casted aluminum body and magazine, directional exhaust.

Applications:
Picture frame, decoration.

SPECIFICATIONS

LENGTH	225 mm
HEIGHT	161 mm
WIDTH	48 mm
WEIGHT	0,86 kg
OPERATING PRESSURE	4-7 bar
LOAD CAPACITY	300 pcs.

FASTENER'S SPECIFICATIONS

TYPE	W5
CROWN	5 mm
THICKNESS	0,3 mm
LENGTH	15 mm



MANUAL WEDGE AND BRAD NAILER

CR P - 3515 / F18



Light-weight, easy and accurate in use, no need of compressed air, uses both wedges and brads, according to the application.


Applications:
Picture frame, decoration.

SPECIFICATIONS

LENGTH	173 mm
HEIGHT	150 mm
WIDTH	30 mm
WEIGHT	0,90 kg
LOAD CAPACITY BRADS	50 pcs.
LOAD CAPACITY WEDGES	150 pcs.

FASTENER'S SPECIFICATIONS

TYPE	^A 12	^B W5
THICKNESS	1,00 x 1,25 mm	0,3 mm
WIDTH	1,00 x 2,00 mm	5 mm
LENGTH	16 mm	15 mm









FASTENING MATERIALS



**80 SERIES
(4-25mm)**



Crown 13mm

TYPE	SUITABLE FOR
80/4	CRISCO:
80/6	CR 80/16N
80/8	CR 80/16 AUT
80/10	CR 80/16 LN 50A
80/12	CR 80/25
80/14	CR 80/16EL
80/16	CR 80/25EL
80/18	CR 112
80/20	AOK:
80/22	CA 7617
80/25	& relevant pneumatic, electric and hand fastening tools.

**Inox -
Antimagnetic
80 SERIES
INOX
(4-14mm)**



Crown 13mm

TYPE	SUITABLE FOR
80/4 Inox	CRISCO:
80/6 Inox	CR 80/16N
80/8 Inox	CR 80/16 AUT
80/10 Inox	CR 80/16 LN 50A
80/12 Inox	CR 80/25
80/14 Inox	CR 80/16EL CR 80/25EL CR 112
	AOK: CA 7617
	& relevant pneumatic, electric and hand fastening tools.

**779 SERIES
(8-25mm)**


Crown 12,2mm

TYPE	SUITABLE FOR
779/8	CRISCO:
779/10	CR 779-25 PLIER
779/12	CR 779/25 SJ
779/14	CR 779/16 BJ
779/16	& relevant pneumatic, fastening tools.
779/18	
779/20	
779/22	
779/25	

**71 SERIES
(6-14mm)**


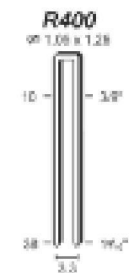
Crown 9,1mm

TYPE	SUITABLE FOR
71/6	CRISCO:
71/8	CR 71/16
71/10	CR 71/16 AUT
71/12	CR 71/16 LN50A
71/14	& relevant pneumatic, electric and hand fastening tools.

**40 SERIES
(4-20mm)**


Crown 4,8mm


TYPE	SUITABLE FOR
40/4	FASCO:
40/4 INOX	F1A 40-16
40/6	F1B 40-19
40/8	F21P 40-25
40/10	& relevant pneumatic, fastening tools.
40/12	
40/14	
40/16	
40/18	
40/20	

**R400 SERIES
(10-38mm)**


Crown 5,6mm

TYPE	SUITABLE FOR
R 410	CRISCO:
R 412	CR 90/25
R 414	CR 90/32B
R 416	CR 90/40L4
R 419	CR 90/40HD
R 422	CR 90-12/35EL
R 425	& relevant pneumatic, and electric fastening tools.
R 430	
R 435	
R 438	


92 SERIES (9-40mm)

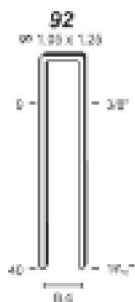

Crown 6,4mm

TYPE	SUITABLE FOR
92 / 9	CRISCO:
92/12	CR 92/40HD
92/15	CR 92/R825
92/20	CR 92/R838
92/25	& relevant pneumatic, fastening tools.
92/30	
92/35	
92/40	


V800 SERIES (25-63mm)

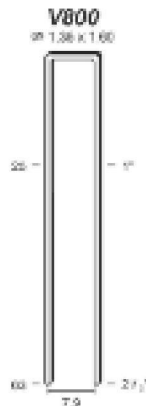

Crown 7,9mm

TYPE	SUITABLE FOR
V 825	CRISCO:
V 830	CR G50 H5
V 835	CR G/NT64C
V 840	& relevant pneumatic, fastening tools.
V 845	
V 850	
V 855	
V 860	
V 863	

R800 SERIES (10-38mm)

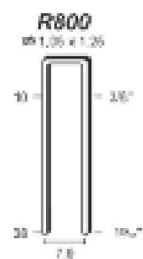

Crown 10,3mm

TYPE	SUITABLE FOR
R 810	CRISCO:
R 814	CR 92/R825
R 816	CR 92/R838
R 819	& relevant pneumatic, fastening tools.
R 825	
R 830	
R 835	
R 838	


KG700 SERIES (25-50mm)



Crown 8,3mm

TYPE	SUITABLE FOR
KG 725	FASCO:
KG 730	F4P B7/NT50
KG 740	Haubold & relevant pneumatic fastening tools.
KG 750	


14 SERIES (20-50mm)

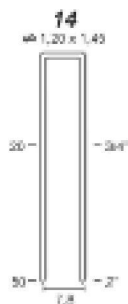

Crown 7,8mm

TYPE	SUITABLE FOR
14/20	BeA pneumatic fastening tools
14/25	
14/30	
14/35	
14/40	
14/45	
14/50	

P SERIES (12-50mm)

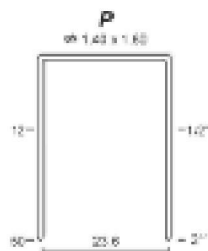


Crown 25mm

TYPE	SUITABLE FOR
P/12	CRISCO:
P/16	CR P40
P/19	& relevant pneumatic, fastening tools.
P/25	
P/32	
P/38	
P/45	
P/50	

32 SERIES


For packing machines



Crown 33,8mm

TYPE	SUITABLE FOR
32/15	CRISCO:
32/18	CR ADB 32/19
	& relevant packing machines.

50 SERIES (6- 14mm)




Crown 12,3mm

TYPE	SUITABLE FOR
50/6	AOK:
50/8	CA 76 17
50/10	& relevant electric and hand fastening tools.
50/12	
50/14	

35 SERIES

For packing machines




Crown 36,8mm

TYPE	SUITABLE FOR
35/15	CRISCO:
35/18	CR ADB 35/19
	CR HCC 35/18
	& relevant packing machines.

T50 SERIES


For hand fastening tools
(6- 14mm)



Crown 9,9mm

TYPE	SUITABLE FOR
T50/6	CRISCO:
T50/8	CR 568
T50/10	AOK:
T50/12	CA 76 17
T50/14	& relevant hand fastening tools.


24 SERIES



Crown 12,9 mm

TYPE	SUITABLE FOR
24/6	CRISCO:
24/8	CR 250
	& relevant hand-tackers.


53 SERIES For hand fastening tools (6- 18mm)



Crown 11,3mm

TYPE	SUITABLE FOR
53/6	CRISCO:
53/8	CR 153
53/10	AOK:
53/12	T8
53/14	T9
53/16	T14
53/18	MAESTRI:
	All types & relevant electric and hand fastening tools.

26 SERIES



Crown 12,7 mm

TYPE	SUITABLE FOR
26/6	CRISCO:
26/8	CR 250
	& relevant hand-tackers.

Headless Pin
6 SERIES
(12-50mm)



TYPE	SUITABLE FOR
6/12	CRISCO:
6/15	CR 64/12-22
6/17	CR P64/35 SCT
6/20	CR P64/50 SCT
6/22	& relevant pneumatic fastening tools.
6/25	
6/30	
6/35	
6/40	
6/45	
6/50	

Pin with head
MB SERIES
(12-40mm)



TYPE	SUITABLE FOR
MB 12	CRISCO:
MB 15	CR MB-8/40
MB 18	CR 112
MB 20	& relevant pneumatic and hand fastening tools.
MB 25	
MB 30	
MB 35	
MB 40	

Headless Pin
CT6 SERIES
(12-50mm)



TYPE	SUITABLE FOR
CT6-12	CRISCO:
CT6-15	CR P64/35SCT
CT6-17	CR P64/50SCT
CT6-20	& relevant pneumatic fastening tools.
CT6-25	
CT6-30	
CT6-35	
CT6-40	
CT6-45	
CT6-50	

Headless Brad
I SERIES
(15-30mm)



TYPE	SUITABLE FOR
I-15	CRISCO:
I-20	CR GN-I30
I-25	CR 568
I-30	& relevant pneumatic and hand fastening tools.

Headless Pin
8 SERIES
(15-40mm)



TYPE	SUITABLE FOR
8/15	CRISCO:
8/18	CR MB-8/40
8/20	& relevant pneumatic fastening tools.
8/25	
8/30	
8/35	
8/40	


Brad with small
head
12 SERIES
(11-57mm)



TYPE	SUITABLE FOR
12-11	CRISCO:
12-13	CR GN-I30
12-16	CR 12/32S2
12-20	CR 12/57S2
12-25	CR 90-12/35EL
12-30	CR 12/35EL
12-30 INOX	CR P-3515/F18
12-35	CR 568
12-40	CR 153
12-45	AOK:
12-50	CA 7617
12-55	& relevant pneumatic, electric and hand fastening tools.
12-57	

Brad with small head

LS II SERIES (15-40mm)



TYPE	SUITABLE FOR
LS II 15	SENCO:
LS II 20	LS II
LS II 25	MAESTRI:
LS II 30	All types.
LS II 40	

Brad with small head

ND SERIES (30-70mm)



TYPE	SUITABLE FOR
ND 30	CRISCO:
ND 38	CR ND64M
ND 45	& relevant
ND 50	pneumatic fastening
ND 55	tools.
ND 60	
ND 64	
ND 70	

Brad with small head

14 SERIES (20-70mm)



TYPE	SUITABLE FOR
14-20	CRISCO:
14-25	CR 14/50L
14-30	CR 14/64 P5
14-35	CR F1.8/57C
14-40	& relevant
14-45	pneumatic fastening
14-50	tools.
14-55	
14-60	
14-64	
14-70	

Inclined brad with small head


DA SERIES (25-63mm)



TYPE	SUITABLE FOR
DA 13 (25 mm)	FASCO:
DA 15 (32 mm)	F3C BA-50
DA 17 (38 mm)	& relevant
DA 19 (45 mm)	pneumatic fastening
DA 21 (50 mm)	tools.
DA 23 (55 mm)	
DA 25 (63 mm)	
	Tilt 34°


Steel brad with small head

FST SERIES (15-50mm)



TYPE	SUITABLE FOR
FST 15HC	CRISCO:
FST 18HC	CR F1.8/57C
FST 20HC	
FST 25HC	
FST 30HC	
FST 35HC	
FST 40HC	
FST 45HC	
FST 50HC	

T-nail in strips
NT SERIES
(32-63mm)

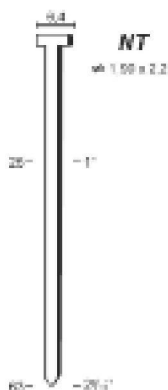


TYPE	SUITABLE FOR
NT 2,2/32	CRISCO:
NT 2,2/38	CR NT64F
NT 2,2/50	CR G/NT64C
NT 2,2/60	& relevant pneumatic fastening tools.
NT 2,2/63	

With round head in strips
LSN SERIES
(100-160mm)




TYPE	SUITABLE FOR
LSN 3,8x100	CRISCO:
LSN 3,8x110	CR S-130G
LSN 3,8x120	CR S-160G
LSN 3,8x130	& relevant pneumatic fastening tools.
LSN 4,2x130	
LSN 4,2x145	
LSN 4,2x160	
LSN 4,6x145	
LSN 4,6x160	
Offered with with screw body until 130mm.	
Tilt 21°, connection with plastic.	

Steel T-nail in strips
NT HC SERIES
(15-64mm)

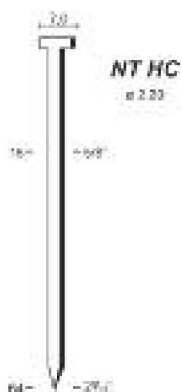

TYPE	SUITABLE FOR
NT 15HC	CRISCO:
NT 18HC	CR NT64F
NT 25HC	
NT 32HC	
NT 38HC	
NT 45HC	
NT 50HC	
NT 57HC	
NT 64HC	

With round head in coils
RBW SERIES
T4 (20-50mm)



TYPE	SUITABLE FOR
RBW-T4 21/30	CRISCO:
RBW-T4 21/40	CR C-50WPC
RBW-T4 21/50	CR C65
Offered with ring body.	
Tilt 16°, connection with wire.	

With round head in strips
RHN SERIES
(60-90mm)



TYPE	SUITABLE FOR
RHN 2,9/60	FASCO:
RHN 2,9/70	F6C RHN 20
RHN 2,9/80	& relevant pneumatic fastening tools.
RHN 2,9/90	
Tilt 21°, connection with plastic.	

With round head in coils
RBW SERIES
(30-90mm)




TYPE	SUITABLE FOR
RBW 21/30	CRISCO:
RBW 21/40	CR C65
RBW 21/50	CR C75
RBW 25/50	CR C90
RBW 25/60	& relevant pneumatic fastening tools.
RBW 27/70	
RBW 29/80	
RBW 29/90	
Offered with smooth, ring or screw body.	
Tilt 16°, connection with wire.	

With round head in coils

RBW SERIES ROOF (19-45mm)

RBW ROOF



TYPE	SUITABLE FOR
RBW ROOF 19	FASCO: F4 CN15W-45 ROOF & relevant pneumatic fastening tools. Tilt 16°, connection with wire.
RBW ROOF 25	
RBW ROOF 32	
RBW ROOF 38	
RBW ROOF 45	

Corrugated nail MiniCF SERIES (6-15mm)




TYPE	SUITABLE FOR
MINI CF/06	CRISCO: CR MINI-CF 16S & relevant pneumatic fastening tools.
MINI CF/08	
MINI CF/09	
MINI CF/12	
MINI CF/15	

SCRAILS



TYPE	SUITABLE FOR
SCR strips	FASCO: F33 CN15W-PS50 SCR F45 CN15W-PS65L SCR F6AC CN15W-90B SCR
CN-AG:	
2.8/3.2x35	
2.8/3.2x45	
2.8/3.2x50	
2.8/3.2x57	
SCR coil	
RBW:	
2.8/3.2x35	
2.8/3.2x45	
2.8/3.2x50	
2.8/3.2x57	
2.8/3.2x65	
2.8/3.2x75	
2.8/3.2x88	

Corrugated nail ΣΕΙΡΑ CF (8-15mm)




TYPE	SUITABLE FOR
CF/08	CRISCO: CR CF 15S & relevant pneumatic fastening tools.
CF/10	
CF/13	
CF/15	

Nail with round head in coils CHD SERIES (16-25mm)



TYPE	SUITABLE FOR
COIL 16/16	ATRO ROLL 32LD Tilt 0°, connection with wire.
COIL 16/18	
COIL 16/25	
COIL 16/16HS*	
* BRONZE W/ DECORATIVE HEAD.	

Plastic Rosette for fastening



TYPE	SUITABLE FOR
PC25	CRISCO: CR C-50WPC



AR srl

Via Ippolito Nievo, 19 20145 Milano, Italy

ph. +39 2 498 96 57 fax +39 2 498 54 31

e mail: info@ar-srl.com <http://www.ar-assemblaggio.com>