

AR Professional Manufacturer
of Pneumatic Clip Ring Tools



AR srl

Via Ippolito Nievo, 19 20145 Milano, Italy

ph. +39 2 498 96 57 fax +39 2 498 54 31

e mail: info@ar-srl.com <http://www.ar-assemblaggio.com>



Company Profile



ALL PRODUCTS :

- Pneumatic Clip Ring Tool
- Pneumatic Clinching Tool
- Manual Pliers
- Hog Ring / C-Ring / D-Ring
- Clips

All tools are compliant with or conforms to EN 792 - 13




PNEUMATIC C-RING TOOL


Model: Pneumatic C-Ring Tool AC01
(Formerly: Pneumatic C-Ring Tool AC31)



Length: 27 cm (10.63")
Width: 9.5 cm (3.74")
Height: 20.0 cm (7.87")
Weight: 1.55 kgs
Air Press: 85 ~ 120 PSI (5 - 8 bars)
Magazine Load Q'ty: 100 - 120 PCS
Popular Application: For Packaging / Bag Closure, Poultry Cages Assembling, Cable Assembling, Mattress etc....



Item No.: AC 31
Crown: 17 ± 0.1 mm
Closed: 3.0 mm inside diameter
Wire Diameter: 16 gauge (0.063" / 1.60 mm)
Wire Material Options: Zinc-Aluminum, Stainless Steel, Galvanized, Aluminum, Nylon coated
Ring Tips (edges): Sharp or Blunt
Ring quantity per box: 20,384 pcs
Weight of per box (gross): 9.0 kgs (19.82 lbs)
Boxes per pallet: 126 boxes




PNEUMATIC C-RING TOOL

Model: Pneumatic C-Ring Tool AC02
(Formerly: Pneumatic C-Ring Tool AC52)



Length: 32.5 cm (12.80")
Width: 10 cm (3.94")
Height: 20.0 cm (7.87")
Weight: 1.47 kgs
Air Press: 85 ~ 120 PSI (5 - 8 bars)
Magazine Load Q'ty: 100 - 120 PCS
Popular Application: For Netting/Mesh, Poultry Cage, Spring Mattress, Bedding, Fencing, Building Construction etc.



Item No.: AC 52
Crown: 23.9 ± 0.1 mm
Closed: 4.7 mm inside diameter
Wire Diameter: 16 gauge (0.063" / 1.60 mm)
Wire Material Options: Zinc-Aluminum, Stainless Steel, Galvanized, Aluminum, Nylon coated
Ring Tips (edges): Sharp or Blunt
Ring quantity per box: 11,200 pcs
Weight of per box (gross): 6.6 kgs (14.53 lbs)
Boxes per pallet: 126 boxes




PNEUMATIC C-RING TOOL

Model: Pneumatic C-Ring Tool AC03 (Tight Closure)
(Formerly: Pneumatic C-Ring Tool AC64)



Length: 32.5 cm (12.80")
Width: 10 cm (3.94")
Height: 20.0 cm (7.87")
Weight: 1.48 kgs
Air Press: 85 ~ 120 PSI (5 - 8 bars)
Magazine Load Q'ty: 100 - 120 PCS
Popular Application: Mattress, Car seat, Building construction and Fencing connection / installation etc..



Item No.: AC 73

Crown: 23.9 ± 0.1 mm

Closed: 5.6 mm inside diameter

Wire Diameter: 15 gauge (0.071" / 1.80 mm)

Wire Material Options: Zinc-Aluminum, Galvanized, Copper Plated, Nylon Coated, Stainless Steel

Ring Tips (edges): Sharp or Blunt

Ring quantity per box: 10,000 pcs

Weight of per box (gross): 8.0 kgs (17.62 lbs)

Boxes per pallet: 126 boxes


*THIS MODEL IS FOR SPECIAL APPLICATION,
PLEASE CONTACT WITH ANN-CHAIN IF YOU NEED.*

PNEUMATIC C-RING TOOL

Model: Pneumatic C-Ring Tool AC04
(Formerly: Pneumatic C-Ring Tool AC73)



Length: 32.5 cm (12.80")
Width: 10 cm (3.94")
Height: 20.0 cm (7.87")
Weight: 1.48 kgs
Air Press: 85 ~ 120 PSI (5 - 8 bars)
Magazine Load Q'ty: 100 - 120 PCS
Popular Application: Mattress, Car seat, Building construction and Fencing connection / installation etc..



Item No.: AC 73

Crown: 23.9 ± 0.1 mm

Closed: 7.8 mm inside diameter

Wire Diameter: 15 gauge (0.071" / 1.80 mm)

Wire Material Options: Zinc-Aluminum, Galvanized, Copper Plated, Nylon Coated, Stainless Steel

Ring Tips (edges): Sharp or Blunt

Ring quantity per box: 10,000 pcs

Weight of per box (gross): 8.0 kgs (17.62 lbs)

Boxes per pallet: 126 boxes



PNEUMATIC C-RING TOOL

Model: Pneumatic C-Ring Tool AC41M Series




Length: 38.4 cm (14.12")
 Width: 21.0 cm (8.27")
 Height: 11.0 cm (4.33")
 Weight: 1.8 kgs
 Air Press: 85 ~ 120 PSI (6 - 8 bars)
 Magazine Load Q'ty: 100 - 120 PCS

Tool Model	Ring Item No.	Wire Dia.	Crown	Closed
AC41B	AC41	16 gauge (1.6mm)	27.7 mm	7.0*7.6
AC41C				8.8*9.2
AC42B	AC42	15 gauge (1.8mm)	28.1 mm	8.0*8.5
AC42C				10.0*10.2
AC43B	AC43	14 gauge (2.0mm)	28.5 mm	7.4*8.1
AC43C				9.2*9.6
AC44B	AC44	13 gauge (2.3mm)	29.1 mm	7.4*8.1
AC44C				9.2*9.6

PNEUMATIC STAPLER

Model: AU 19



Length: 455 mm (17.91")
 Width: 46 mm (1.81")
 Height: 900 mm (35.43")
 Weight: 3.0 kgs (6.6 LBS)
 Driving Power: 861 in / lbs
 Op. Pressure: 70 ~ 120 PSI (4.8~ 8.3 bar)
 Cycle Rate: 4 - 6 staples / sec
 Wire size: 1.5 mm
 Standard Material: Galvanized
 Height Options: 16/ 19/ 22/ 25mm

Features:

- ※ Pneumatic Stapler for driving staples into hard to reach places such as bottoms of coil springs.
- ※ Perfect for fastening the bottoms of coil springs.
- ※ Uses two staple sizes commonly used for the bedding industry.
- ※ Double staple fire available.



PNEUMATIC C-RING TOOL

Model: Pneumatic Clip Tool AC21/22/23/24



Length: 38 cm (14.96")

Width: 23 cm (9.06")


Height: 10 cm (3.94")

Weight: 1.6 kgs

Air Press: 85 ~ 120 PSI (5 - 8 bars)

Magazine Load Q'ty: 100 - 120 PCS

Tool Model	AC 21	AC 22	AC 23	AC 24
Ring Item No.	AC 31	AC 52	AC 73	HR 20
Available Ring size				
Character:	Design by simple parts, easy to replacement. Long Jaws enables to reach and fasten thick covering materials to seat framing inside car seat.			

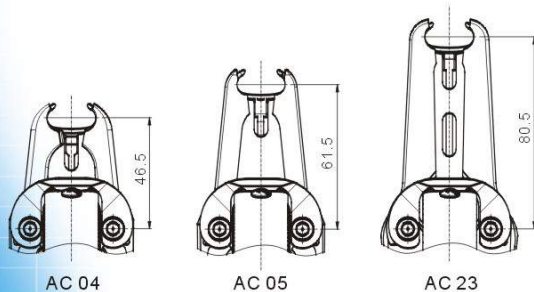

STAPLE

Model: AE 01 / AE 02 / AE 03 / AE 11 / AE 21

STAPLE BEFORE SIZE (mm)			
TOOLS	AE 01	AE 02	AE 03
CROWN (mm)	11.6	12.0	11.6
WIRE SIZE (mm)	0.6 x 0.9	0.5 x 1.2	0.6 x 1.6
STANDARD RING MATERIAL AVAILABLE	GALVANIZED	GALVANIZED	GALVANIZED
Height Options (mm)	10, 12, 14, 16, 18, 20, 22, 25	10, 12, 14, 16, 18, 20, 22, 25	12, 14, 16, 18, 20, 25
Replaces Staple Model	P82	P88	P110

STAPLE BEFORE SIZE (mm)		
TOOLS	AE 11	AE 21
CROWN (mm)	11.3	10.85
WIRE SIZE (mm)	0.6 x 1.3	0.75 x 1.4
STANDARD RING MATERIAL AVAILABLE	GALVANIZED	GALVANIZED
Height Options (mm)	12, 14, 16, 18, 20, 22	12, 14, 16, 18, 20, 22
Replaces Staple Model	779	9022

PNEUMATIC STAPLER

Model: AE 01 / AE 02 / AE 03 / AE 11 / AE 21



Jaw Style: Short Jaw (SJ)

Length: 35 cm (13.78")

Width: 8.0 cm (3.15")

Height: 30cm (11.81")

Weight: 2.1 kgs

Air Press: 100 ~ 120 PSI (6 - 8 bars)

Magazine Load Q'ty: 180-280 PCS

Popular Application:

Ideal for bedding, coconut matting and other specially applications.

The difference among the Stapler AE01/02/03

- ⊙ Different thickness of the staples.
- ⊙ The wire dimensions of the staples working with AE01 and 02 are much thinner.
The coconut fiber mattress is the best recommendation to use the tools and staples on.
- ⊙ The wire dimensions of the staples AE03 are thick, we suggest you use on the foam.



PNEUMATIC STAPLER

Model: AE01LJ / AE02LJ / AE03LJ / AE11LJ / AE21LJ



Jaw Style: Long Jaw (LJ)

Length x Width x Height:

35 cm (13.78") x 8.0cm (3.15") x 30cm (11.81")

Feature:

This is a heavy duty pneumatic plier for stapling thicker material up to 18 mm. It can staple various types industrial stapling and splicing of different materials.

Model: AE01BJ / AE02BJ / AE03BJ / AE11BJ / AE21BJ



Jaw Style: Riveting blade (BJ)

Length x Width x Height:

35 cm (13.78") x 8.0cm (3.15") x 30cm (11.81")

Feature:

This tool is a heavy duty pneumatic stapler, it can be used into corrugated and solid fibreboard for fastening of two thicknesses of double wall or four thicknesses of single wall board.

PNEUMATIC D-RING TOOL

Model: Pneumatic D-Ring Tool AD02

Length: 26 cm (10.24")

Width: 4.5 cm (1.77")

Height: 21.0 cm (8.27")

Weight: 1.43 kgs

Air Press: 85~96 PSI (5 - 7 bars)

Magazine Load Q'ty: 50 PCS

Popular Application: Ideal for bedding, seating, bag closures and specialty applications.



Model: Pneumatic D-Ring Tool AD02R / AD02L



Character :

To work more convenient by changing the direction of the magazine assembly for deeper penetration and connecting the spring wires of the mattress.

We offer the service to change the magazine assembly direction upon customer's demand as well.

PNEUMATIC D-RING TOOL

Model: Pneumatic D-Ring Tool AD03



Length: 26 cm (10.24")

Width: 4.5 cm (1.77")

Height: 43.0 cm (16.93")

Weight: 1.51 kgs


Air Press: 85~96 PSI (5 - 7 bars)

Magazine Load Q'ty: 100 PCS

Popular Application: Ideal for bedding, seating, bag closures and specialty applications.

Character: Long Magazine can load more rings one time, it will save much time on work.

Note: We offer the service to change the magazine assembly direction upon customer's demand as well.



Crown: 22.0 mm

Closed: 6-8 mm inside diameter

Wire Diameter: 15 gauge (0.071"/ 1.80 mm)

Wire Material Options : Galvanized / St. Steel / Zinc-aluminum / Aluminum

Ring Tips (edges) : Sharp

Ring quantity per box : 11,616 pcs

Weight of per box (gross) : 8.67 kgs (17.62 lbs)

Boxes per pallet : 126 boxes



PNEUMATIC D-RING TOOL AD43M



Length: 26.09 cm (10.27")

Width: 5.3 cm (2.09")


Height: 33.57 cm (13.22")

Weight: 1.8 kgs

Air Press: 90 - 110 PSI (6 - 7 bars)

Magazine Load Q'ty: 90 PCS

Popular Application: Bag closures and other specially application.



Ring Item No.	HR 30
Crown	30 mm (1.18")
Closed	10.0 ~ 11.0 mm (inside diameter)
Wire Diameter	14 gauge (2.0 mm)
Wire Material Options	Zinc-Aluminum / Stainless Steel / Galvanized
Ring Tips (edges)	Sharp or Blunt
Ring quantity per box	6480 pcs
Weight of per box (N.W)	7.78 kgs
Boxes per pallet	126 boxes

POPULAR APPLICATION



PNEUMATIC CLINCHING TOOL



Length: 43.0 cm (16.93")

Width: 9.0 cm (3.54")

Height: 16.0 cm (6.3")

Weight: 3.21 kgs

Air Press: 90 ~ 120 PSI (6 - 8 bars)



Popular Application:

Spring Mattress
Poultry Cage Assembling
Cable Assembling

Model: AF54A / AF55A / AF56A
(Sharp Head of Anvil)



Popular Application:

Razor Wire / Fence Installation /
Poultry cages assembling

MANUAL CLINCHING PLIER



Length: 51.6 cm (20.31")

Width: 65.2 cm (25.67")

Height: 7.2 cm (2.83")

Weight: 2.0 kgs





Magazine Load Q'ty: 25 - 44 PCS

Popular Application: Poultry cages assembling
cable assembling, Fence Installation

COMPETITOR TOOLS MODEL CONVERSION

ANN-CHAIN	COMPETITOR
AF 01	M 65
AF 02	M 66
AF 03	M 85
AF 04	M 87
AF 05	M 88
AF 06	M 85S
AF 31	M 45
AF 32	M 46

WIDE RANGE CLIPS FOR YOUR APPLICATIONS

Tool Model						
Pneumatic	Manual Plier					
AF 01	AF 01H	4.8	12.7	CL-23	CL-73	
			15.5	CL-24	CL-74	
AF 02	AF 02H	6.2	12.3	CL-03	CL-71	
			14.1	CL-04	CL-72	
			15.5		CL-05	
AF 03	AF 03H	6.8	17.1	CL-34		
AF 05	AF 05H	8.4	21.4	CL-38		
AF 06	AF 06H	7.0	18.5		CL-75	
AF 31	AF 31H	4.8	10.7			CL-13
			12.7			CL-17
AF 32	AF 32H	5.8	13.3			CL-18
AF54/AF54A	AF54H / AF54AH	10.0	19.0			CL-39
			17.0			CL-37
AF55 / AF55A	AF55H / AF55AH	10.0	15.0			CL-35
AF56/AF56A	AF56H/AF56AH	10.0	13.0			CL-33

PNEUMATIC ROLL FED CLINCHING TOOL



Length: 36.53 cm (14.38")

Width: 28.42 cm (11.19")

Height: 16.92 cm (6.66")

Weight: 3.6 kgs

Air Press: 90 ~ 120 PSI (6 - 8 bars)

Popular Application: Poultry Cages Assembling /
Mattress / Cable Assembling

Tool				Tool		
AF 01C	4.8	12.7	CL-23C	AF 01B	CL-73C	
		15.5	CL-24C		CL-74C	
AF 02C	6.2	12.3	CL-03C	AF 02B	CL-71C	
		14.1	CL-04C		CL-72C	
		15.5			CL-05C	
AF 03C	6.8	17.1	CL-34C			
	7.0	18.5		AF 06B	CL-75C	
AF 05C	8.4	21.4	CL-38C			
AF 31F	4.8	10.7				CL-13C
		12.7				CL-17C
AF 32F	5.8	13.3				CL-18C
AF 54F	10.0	19.0				CL-39C
		17.0				CL-37C
AF 55F	10.0	15.0				CL-35C
AF 56F	10.0	13.0				CL-33C

ROLL FED FRAME AFF01

Length: 1500 mm (59")

Width: 900 mm (35.4")

Height: 2400 mm (94.49")

Weight: 46 kgs (Not including tool and clips)

Magazine Capacity: 10,000 to 15,000 clips


Application: Apply clips from a continuous clip coil
at an average rate of 15,000 clips.

Features: ※ Easy-load feed rail for faster loading and less downtime.
※ Roll clip feed with up to at least 10,000 clips per roll.

The price of frame
will not include the
bouncing hanger.



Coil Clip

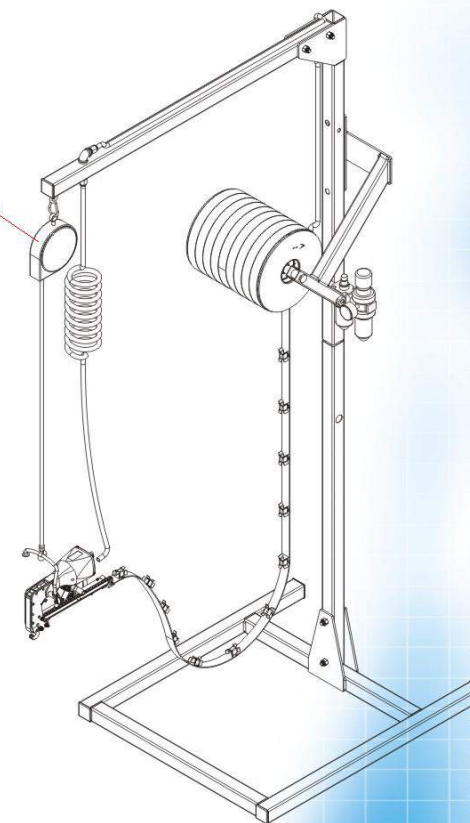

PNEUMATIC C-RING TOOL

Model: Pneumatic C-Ring Tool AC41M Series




Length: 38.4 cm (14.12")
 Width: 21.0 cm (8.27")
 Height: 11.0 cm (4.33")
 Weight: 1.8 kgs
 Air Press: 85 ~ 120 PSI (6 - 8 bars)
 Magazine Load Q'ty: 100 - 120 PCS
 Wire Material Options: Zinc-Aluminum / Stainless
 Steel / Galvanized / Aluminum
 Ring Tips (edges): Sharp or Blunt

Tool Model	Ring Item No.	Wire Dia.	Crown	Closed
AC41B	AC41	16 gauge (1.6mm)	27.7 mm	7.0*7.6
AC41C				8.8*9.2
AC42B	AC42	15 gauge (1.8mm)	28.1 mm	8.0*8.5
AC42C				10.0*10.2
AC43B	AC43	14 gauge (2.0mm)	28.5 mm	7.4*8.1
AC43C				9.2*9.6
AC44B	AC44	13 gauge (2.3mm)	29.1 mm	7.4*8.1
AC44C				9.2*9.6

POPULAR APPLICATION

Popular Application

Fencing / Packaging / Bag Closure / 3D Panel / Animal Cages Assembling, Cable Assembling...

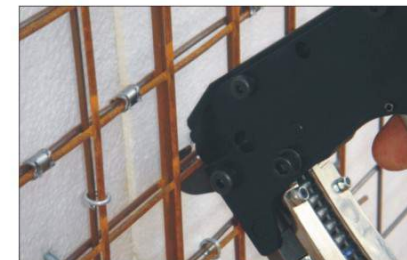

Razor Wire

PNEUMATIC C-RING TOOL

Model: Pneumatic C-Ring Tool AC50M



Length: 52.4 cm (20.63")

Width: 32.2 cm (12.68")

Height: 22.9 cm (9.02")

Weight: 6.6 kgs

Air Press: 110 ~ 130 PSI (7 - 8 bars)

Magazine Load Q'ty: 100 PCS

Package: In a plastic case (It will be safe and convenient when you carry it to outdoor.)



C-RING HAND PLIERS

Model: C-Ring Hand Pliers AC50MH



Length: 68.3 cm (26.89")


Width: 16.5 cm (6.50")

Height: 12.63 cm (4.97")

Weight: 2.5 kgs

Magazine Load Q'ty: 50 PCS

Popular Application: Gabion Basket Installation / Fence Installation / Large Bag Closure / Construction ...



Ring Item No.	AC50
Crown	45.1 mm
Closed	11~13 mm (inside diameter)
Wire Diameter	10 gauge (3.0 mm)
Wire Material Options	Zinc-Aluminum / Stainless Steel / Galvanized / Aluminum
Ring Tips (edges)	Sharp or Blunt
Ring quantity per box	1,600 pcs
Weight of per box (N.W)	8.0 kgs
Boxes per pallet	156 boxes
Note	Suitable for Pneumatic and Hand Pliers

POPULAR APPLICATION

Gabion Basket Installation / Fence Installation / Large Bag Closure / Construction ...



POPULAR APPLICATION



PNEUMATIC CLIP TOOL

Model: Pneumatic Clip Tool AC 06



C-Ring Clip (piece by piece)

Length: 32.5 cm (12.80")

Width: 10 cm (3.94")

Height: 20.0 cm (7.87")

Weight: 1.47 kgs

Air Press: 85 ~ 120 PSI (5 - 8 bars)

Popular Application: For Netting / Mesh, Fencing, Razor wire etc.



MANUAL PLIER

Model: C-7



Length: 6.8 cm (2.68")




Width: 4.0 cm (1.57")

Height: 1.4 cm (0.55")

Weight: 0.25 kgs

Popular Application: For continuing application of nets, cages, fences and bedding, etc.

Ring Options :

ITEM			
Ring type	Loose C-Ring AC 73	Loose C-Ring #3	Loose C-Ring #2
Crown	23.9mm	18.5mm	16.3mm
Closed (Inside Diameter)	7.8 mm	6.0 ~ 6.5mm	5.0 ~ 5.5mm
Wire Diameter	15 gauge (0.071" / 1.80 mm)	14 gauge (0.079" / 2.00 mm)	14 gauge (0.079" / 2.00 mm)
Wire Material Options	Galvanized Stainless Steel	Galvanized Stainless Steel	Galvanized Stainless Steel
Ring Tips (edges)	Sharp	Blunt	Blunt
Quantity per bag	About 5100 pcs	About 2857 pcs	About 3333 pcs
Weight of per bag (gross)	4.0 kgs (8.81 lbs)	2.0 kgs (4.405 lbs)	2.0 kgs (4.405 lbs)
Quantity per carton	4 bags	12 bags	12 bags

MANUAL PLIER



Model: B-7

Length: 18 cm (7.09")

Width: 9.5 cm (3.74")

Height: 2.3 cm (0.91")

Weight: 0.34 kgs

Magazine Load Q'ty: 50 PCS

Popular Application: This is a manual plier for continuing application of nets, cages, fences and bedding, etc.



Model: B-22

Length: 21 cm (8.27")

Width: 7.0 cm (2.76")

Height: 2.0 cm (0.79")

Weight: 0.5 kgs

Magazine Load Q'ty: 48 PCS

Popular Application: Netting, Fencing, Nursery, Garland, Closing Wire Mesh Products, Gabion Basket Installations, Large Bage Closures, etc.



Model: B-14

Length: 17.76 cm (6.99")

Width: 17.7 cm (6.97")




Height: 4.86 cm (1.91")

Weight: 0.5 kgs

Magazine Load Q'ty: 50 PCS

Popular Application: This is a manual plier for continuing application of nets, cages, fences and bedding, etc.

RING OPTIONS

			
RING BEFORE AND AFTER CLOSURE (mm)			
TOOLS	B-7	AD01/AD02/ AD03/B-22	B-14
RING ITEM NO.	B7	HR 22	B14
WIRE SIZE	1.2 x 1.7mm	1.8mm	1.7mm
CLOSURE SIZE (I.D.MIN.-MAX.)	3mm~4mm	6mm~8mm	5.7mm - 6.2mm
STANDARD RING MATERIAL AVAILABLE	GALVANIZED	GALVANIZED	GALVANIZED
	ST. STEEL	ST. STEEL	ST. STEEL
	ALUMINUM	ALUMINUM	ALUMINUM
	ZINC-ALUMINUM	ZINC-ALUMINUM	ZINC-ALUMINUM
RING STICK QUANTITY	50	48	50
RING BOX QUANTITY	22000 / 2500	11616	2500

C-RINGS

RING BEFORE AND AFTER CLOSURE (mm)				
TOOLS	AC31 / AC01	AC52 / AC02	AC64/AC73/AC73LN/AC03/AC04/AC05/AC13/AC14/AC23	AC16/AC24
RING NO	AC31	AC52	AC73	HR20
WIRE SIZE	1.6mm	1.6mm	1.8mm	1.44mm
CLOSURE SIZE (I.D.MIN.-MAX.)	2mm~4mm	3mm~5mm	6mm~8mm	4mm~6mm
STANDARD RING MATERIAL AVAILABLE	GALVANIZED ALUMINUM ST. STEEL ZINC-ALUMINUM	GALVANIZED ALUMINUM ST. STEEL ZINC-ALUMINUM	GALVANIZED ALUMINUM ST. STEEL ZINC-ALUMINUM	GALVANIZED ALUMINUM ST. STEEL ZINC-ALUMINUM
RING STICK QUANTITY	112	112	100	116
RING BOX QUANTITY	20,384	11,200	10,000	18,096
NOTE	Zinc-Aluminum (Zinc 5% , Aluminum alloy - coated)			

RING BEFORE AND AFTER CLOSURE (mm)				
TOOLS	AC42M	AC43M	AC50	B-7
RING NO	AC42	AC43	AC50	B7
WIRE SIZE	1.8mm	2.0mm	3.0mm	1.2x1.7mm
CLOSURE SIZE (I.D.MIN.-MAX.)	8.0 x 8.5 mm 10.0 x 10.2mm	7.4 x 8.1 mm 9.2 x 9.6 mm	11~13 mm	3mm~4mm
STANDARD RING MATERIAL AVAILABLE	GALVANIZED ALUMINUM ST. STEEL ZINC-ALUMINUM	GALVANIZED ALUMINUM ST. STEEL ZINC-ALUMINUM	GALVANIZED ALUMINUM ST. STEEL ZINC-ALUMINUM	GALVANIZED ALUMINUM ST. STEEL ZINC-ALUMINUM
RING STICK QUANTITY	100	95	50	50
RING BOX QUANTITY	5600	5320	1600	22000 / 2500

HOG RING

RING BEFORE AND AFTER CLOSURE (mm)				
TOOLS	AD01/AD02/AD03/B-22	AD42M/AD43M	M-Plier	B14
RING NO	HR22	HR30	M-Ring	B14
WIRE SIZE	1.8mm	2.0mm	2.0mm	1.7mm
CLOSURE SIZE (I.D.MIN.-MAX.)	6mm~8mm	10mm~11mm	7mm~8.5mm	5.7mm ~ 6.2mm
STANDARD RING MATERIAL AVAILABLE	GALVANIZED ALUMINUM ST. STEEL ZINC-ALUMINUM	GALVANIZED	GALVANIZED	GALVANIZED ALUMINUM ST. STEEL ZINC-ALUMINUM
RING STICK QUANTITY	48	90	37	50
RING BOX QUANTITY	11,616	6,480	1,480	2,500

RING BEFORE AND AFTER CLOSURE (mm)			
TOOLS	C-7	C-7	C-7
RING NO	Loose C-Ring AC 73	Loose C-Ring #3	Loose C-Ring #2
WIRE SIZE	1.8mm	2.0mm	2.0mm
CLOSURE SIZE (I.D.MIN.-MAX.)	6mm~8mm	6.0mm~6.5mm	5.0mm~5.5mm
STANDARD RING MATERIAL AVAILABLE	GALVANIZED ST. STEEL	GALVANIZED ST. STEEL	GALVANIZED ST. STEEL
WEIGHT OF PER PACK	4 kgs/pack	2 kgs/pack	2 kgs/pack
QUANTITY PER CARTON	4 packs/carton	12 packs/carton	12 packs/carton

STAPLES

STAPLE BEFORE SIZE (mm)				
TOOLS	AE 01	AE 02	AE 03	AE 11
WIRE SIZE (mm)	0.6 x 0.9	0.5 x 1.2	0.6 x 1.6	0.6 x 1.3
STANDARD RING MATERIAL AVAILABLE	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
Height Options (mm)	10, 12, 14, 16, 18, 20, 22, 25	10, 12, 14, 16, 18, 20, 22, 25	12, 14, 16, 18, 20, 25	12, 14, 16, 18, 20, 22

STAPLE BEFORE SIZE (mm)			
TOOLS	AE 21	Stapler 5/16"	U Plier
WIRE SIZE (mm)	0.75 x 1.4	1.05 x 1.3	1.5
STANDARD RING MATERIAL AVAILABLE	GALVANIZED	GALVANIZED	GALVANIZED
Height Options (mm)	12, 14, 16, 18, 20, 22	25	16, 19, 22, 25

SPECIALTY APPLICATION

